


# AL 1280 TS SPECIFICATIONS & STANDARD LIST

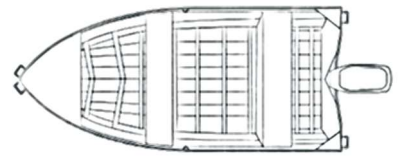

## SPECIFICATIONS:

<b>Max people</b> 4	<b>Fuel Capacity</b> 12L (Portable Tank)	<b>Standard Engine</b> Honda BF20 DK2 LHU
<b>Overall Hull Length</b> 3.90m	<b>Beam</b> 1.89m	<b>Optional Engine</b> Honda BF30 DK2 LHTU or Mercury 30 MLHGA
<b>Length on Trailer</b> 5.00m	<b>Bottom Sheet</b> 2.0mm	<b>Maximum Weight on Transom</b> 125kg
<b>Height on Trailer</b> 1.42m	<b>Side Sheet</b> 1.6mm	<b>Standard Dunbier Trailer</b> Sports 4M-13SL
<b>Width on Trailer</b> 2.10m	<b>Dry Towing Weight</b> 465kg (approx.)	

## STANDARD EQUIPMENT LIST

- CAD Designed Whittley Hull
- Factory Supplied Owner's Manual
- Local Registrations (Where Available) (Boat & Trailer)
- Pre-Delivery BMT Package
- Delivery From Closest Whittley Boating Centre
- Registration Stickers
- 1.6mm Pressed Side Sheets
- 2.0mm Pressed Bottom Sheets
- Flat Foredeck
- Welded Cross Thwarts Front & Rear
- Cross Thwart Flotation
- External Keel
- Anchor Shelf
- Anchor Rope Tie Off Point
- 2 x Rowlock Blocks
- Solid Transom Corners
- Flat Bow Handle x 2
- Transom Handle x 2
- Back Board
- 2 x Rod Holders
- Glove Box In Thwart Seat
- Fuel Tank Rack
- Cleat For Anchor Rope
- Double Eye Bow
- Screw In Bungs x 2
- Transom Strut
- Australian Builders Plate
- Electric Motor Bracket
- Paint White Interior & Exterior
- Victorian Inshore Safety Kit
- Mounted Fire Extinguisher
- Carpet Floor Full Length
- Side Rails
- Extruded Side Decks
- Casting Platform
- Fuel Tank Rack
- Rear Step & Rail
- Transducer Bracket
- Sounder & Switchbox Bracket (Mounted Off Side Deck)
- Side Pockets (Pair)
- Anchor, Rope & Chain Combination
- Trailer Tie Down Straps
- Trailer Spare Wheel & Bracket
- Trailer Winch
- Alloy Wheels & Black Guards
- Jockey Wheel
- Exclusive Structural 2 + 1 Year Whittley Hull Warranty
- Whittley Sports Decal Kit
- Whittley QR Code Service & Boating Accessory Decals
- Whittley Spare Wheel Cover
- Whittley Service Wallet Holder



**SPECIFICATION & STANDARD EQUIPMENT PRODUCT SHEET DISCLAIMER:** Every effort has been made to ensure that the information on this document is correct and up to date. However, Whittley Marine Group Pty Ltd ACN 6279 33635 ("Whittley") does not provide any warranty as to the completeness or accuracy of the information and subject to applicable laws, does not accept any liability for damages of any kind resulting from the access or use of this content. This document & information is produced as a guide only.

\* The height and length on trailer measurement, can be reduced or lowered upon request, for example, a swing away draw bar option is available to reduce the overall length, please talk to your local dealer for more information. Measurements supplied are to be used as a guide only, to confirm measurements before making a purchase decision based upon these measurements, consult your Authorized Whittley Dealer or Whittley Factory Sales Representative. These measurements supplied are only to act as a guide and may vary from time to time.

\*\* Dry towing weight is an approximate guide and is a best-case scenario, this may vary and is the approximate base package weight with no options. The addition of factory supplied options, will increase the total BMT package weight, consult your Authorized Whittley Dealer or Whittley Factory Sales Representative for more information regarding towing weights and post purchase consult your owner's manual.

\*\*\* Boat trailer packages on a mechanically braked trailer with a ATM of 2,200 kg rating and a GVM rating of 2,000 kg's, require a maximum of 10% of the package weight to be on the tow ball as down weight. For more information, please consult your owner's manual, Authorized Whittley Dealer or Whittley Factory Sales Representative for more prior to purchase.

